

HITACHI

FOR MESSRS. _____

DATE. Jul.18,2002

CUSTOMER'S ACCEPTANCE SPECIFICATIONS

SP14Q002-C1

C O N T E N T S

No.	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701- SP14Q002-C1-6	1-1/1
2	RECORD OF REVISION	7B64PS 2702- SP14Q002-C1-6	2-1/3~3/3
3	GENERAL SPECIFICATION	7B64PS 2703- SP14Q002-C1-6	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704- SP14Q002-C1-6	4-1/1
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705- SP14Q002-C1-6	5-1/2~2/2
6	OPTICAL CHARACTERISTICS	7B64PS 2706- SP14Q002-C1-6	6-1/2~2/2
7	BLOCK DIAGRAM	7B64PS 2707- SP14Q002-C1-6	7-1/1
8	INTERFACE TIMING	7B64PS 2708- SP14Q002-C1-6	8-1/3~3/3
9	OUTLINE DIMENSIONS	7B63PS 2709- SP14Q002-C1-6	9-1/2~2/2
10	QUALITY STANDARD	7B64PS 2710- SP14Q002-C1-6	10-1/3~3/3
11	PRECAUTION IN DESIGN	7B64PS 2711- SP14Q002-C1-6	11-1/3~3/3
12	DESIGNATION OF LOT MARK	7B64PS 2712- SP14Q002-C1-6	12-1/1
13	PRECAUTION FOR USE	7B64PS 2713- SP14Q002-C1-6	13-1/1

* When product will be discontinued , customer will be informed by HITACHI
with twelve months prior announcement.

ACCEPTED BY; _____

PROPOSED BY; M. C. Chen

RECORD OF REVISION

DATE	SHEET No.	SUMMARY																	
Mar.29.02'	7B64PS-2704- SP14Q002-C1-2 PAGE 4-1/1	4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS																	
		<table><tr><th rowspan="2">ITEM</th><th colspan="2">OPERATING</th><th colspan="2">STORAGE</th></tr><tr><th>MIN.</th><th>MAX.</th><th>MIN.</th><th>MAX.</th></tr><tr><td>Ambient Temperature</td><td>0℃</td><td>50℃ Note 5</td><td>-20℃</td><td>60℃</td></tr></table>	ITEM	OPERATING		STORAGE		MIN.	MAX.	MIN.	MAX.	Ambient Temperature	0℃	50℃ Note 5	-20℃	60℃			
		ITEM		OPERATING		STORAGE													
			MIN.	MAX.	MIN.	MAX.													
Ambient Temperature	0℃	50℃ Note 5	-20℃	60℃															
↓ Revised																			
		<table><tr><th rowspan="2">ITEM</th><th colspan="2">OPERATING</th><th colspan="2">STORAGE</th></tr><tr><th>MIN</th><th>MAX</th><th>MIN</th><th>MAX</th></tr><tr><td>Ambient Temperature</td><td>-20℃</td><td>70℃ Note 5</td><td>-30℃</td><td>80℃</td></tr></table>	ITEM	OPERATING		STORAGE		MIN	MAX	MIN	MAX	Ambient Temperature	-20℃	70℃ Note 5	-30℃	80℃			
ITEM	OPERATING			STORAGE															
	MIN	MAX	MIN	MAX															
Ambient Temperature	-20℃	70℃ Note 5	-30℃	80℃															
		Note 2 Ta at 0℃ < 48h, at 60℃ < 168h. ↓ Revised Note 2 Ta at -30℃ < 48h, at 80℃ < 168h.																	
Apl.19.02'	7B64PS-2704- SP14Q002-C1-3 PAGE 4-1/1	4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS																	
		Added: Note 6 Operation temp not include CFL lamp.																	
	7B64PS-2704- SP14Q002-C1-3 PAGE 5-1/1	5.1 ELECTRICAL CHARACTERISTICS																	
		<table><tr><th>ITEM</th><th>SYMBOL</th><th>CONDITION</th><th>TYP.</th><th>UNIT</th></tr><tr><td>Recommended LC</td><td rowspan="3">VDD-V0</td><td>Ta=0℃ , ϕ=0°</td><td>22.0</td><td>V</td></tr><tr><td>Driving Voltage</td><td>Ta=25℃ , ϕ=0°</td><td>21.0</td><td>V</td></tr><tr><td>Note 3</td><td>Ta=50℃ , ϕ=0°</td><td>20.0</td><td>V</td></tr></table>	ITEM	SYMBOL	CONDITION	TYP.	UNIT	Recommended LC	VDD-V0	Ta=0℃ , ϕ=0°	22.0	V	Driving Voltage	Ta=25℃ , ϕ=0°	21.0	V	Note 3	Ta=50℃ , ϕ=0°	20.0
ITEM	SYMBOL	CONDITION	TYP.	UNIT															
Recommended LC	VDD-V0	Ta=0℃ , ϕ=0°	22.0	V															
Driving Voltage		Ta=25℃ , ϕ=0°	21.0	V															
Note 3		Ta=50℃ , ϕ=0°	20.0	V															
	↓ Revised																		
	<table><tr><th>ITEM</th><th>SYMBOL</th><th>CONDITION</th><th>TYP.</th><th>UNIT</th></tr><tr><td>Recommended LC</td><td rowspan="3">VDD-V0</td><td>Ta=0℃ , ϕ=0°</td><td>(25.0)</td><td>V</td></tr><tr><td>Driving Voltage</td><td>Ta=25℃ , ϕ=0°</td><td>(24.0)</td><td>V</td></tr><tr><td>Note 3</td><td>Ta=50℃ , ϕ=0°</td><td>(23.0)</td><td>V</td></tr></table>	ITEM	SYMBOL	CONDITION	TYP.	UNIT	Recommended LC	VDD-V0	Ta=0℃ , ϕ=0°	(25.0)	V	Driving Voltage	Ta=25℃ , ϕ=0°	(24.0)	V	Note 3	Ta=50℃ , ϕ=0°	(23.0)	V
ITEM	SYMBOL	CONDITION	TYP.	UNIT															
Recommended LC	VDD-V0	Ta=0℃ , ϕ=0°	(25.0)	V															
Driving Voltage		Ta=25℃ , ϕ=0°	(24.0)	V															
Note 3		Ta=50℃ , ϕ=0°	(23.0)	V															
		5.2 ELECTRICAL CHARACTERISTICS OF BACKLIGHT Added: Note : The half operating life time of backlight. CFL:50,000h(Average)																	
	7B64PS 2706- SP14Q002-C1-3 PAGE 6-1/2	6.1 OPTICAL CHARACTERISTICS Response(rise) tr:120 → (336) Response(fall) tf:150 → (148)																	

RECORD OF REVISION

DATE	SHEET No.	SUMMARY																																				
Jul.11,'02	7B64PS-2703-SP14Q002-C1-4 PAGE 3-1/1	(10) BACK LIGHT Added : The half brightness life time of backlight CFL : 50,000h(average)																																				
	7B64PS-2704-SP14Q002-C1-4 PAGE 4-1/1	4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS <table><tr><th rowspan="2">ITEM</th><th colspan="2">OPERATING</th><th colspan="2">STORAGE</th></tr><tr><th>MIN.</th><th>MAX.</th><th>MIN.</th><th>MAX.</th></tr><tr><td>Ambient Temperature</td><td>-20℃</td><td>70℃ Note 5</td><td>-30℃</td><td>80℃</td></tr></table> <p style="text-align: center;">↓ Revised</p> <table><tr><th rowspan="2">ITEM</th><th colspan="2">OPERATING</th><th colspan="2">STORAGE</th></tr><tr><th>MIN.</th><th>MAX.</th><th>MIN.</th><th>MAX.</th></tr><tr><td>Ambient Temperature</td><td>0℃</td><td>50℃ Note 5</td><td>-20℃</td><td>60℃</td></tr></table> <p>Note 2 Ta at -30℃<48h, AT 80℃ < 168h ↓ Revised Note 2 Ta at 0℃<48h, AT 60℃ < 168h</p>	ITEM	OPERATING		STORAGE		MIN.	MAX.	MIN.	MAX.	Ambient Temperature	-20℃	70℃ Note 5	-30℃	80℃	ITEM	OPERATING		STORAGE		MIN.	MAX.	MIN.	MAX.	Ambient Temperature	0℃	50℃ Note 5	-20℃	60℃								
ITEM	OPERATING			STORAGE																																		
	MIN.	MAX.	MIN.	MAX.																																		
Ambient Temperature	-20℃	70℃ Note 5	-30℃	80℃																																		
ITEM	OPERATING		STORAGE																																			
	MIN.	MAX.	MIN.	MAX.																																		
Ambient Temperature	0℃	50℃ Note 5	-20℃	60℃																																		
7B64PS 2705-SP14Q002-C1-4 PAGE 5-1/1	5.1 ELECTRICAL CHARACTERISTICS <table><tr><th>ITEM</th><th>SYMBOL</th><th>CONDITION</th><th>TYP.</th><th>UNIT</th></tr><tr><td>Recommended LC</td><td rowspan="3">VDD-V0</td><td>Ta=0℃ ϕ=0°</td><td>(25.0)</td><td>V</td></tr><tr><td>Driving Voltage</td><td>Ta=25℃ ϕ=0°</td><td>(24.0)</td><td>V</td></tr><tr><td>Note 3</td><td>Ta=50℃ ϕ=0°</td><td>(23.0)</td><td>V</td></tr></table> <p style="text-align: center;">↓ Revised</p> <table><tr><th>ITEM</th><th>SYMBOL</th><th>CONDITION</th><th>TYP.</th><th>UNIT</th></tr><tr><td>Recommended LC</td><td rowspan="3">VDD-V0</td><td>Ta=0℃ ϕ=0°</td><td>22.0</td><td>V</td></tr><tr><td>Driving Voltage</td><td>Ta=25℃ ϕ=0°</td><td>21.0</td><td>V</td></tr><tr><td>Note 3</td><td>Ta=50℃ ϕ=0°</td><td>20.0</td><td>V</td></tr></table> <p>Note 4 VDD-V0=(24.0)V → (21.0)V</p>	ITEM	SYMBOL	CONDITION	TYP.	UNIT	Recommended LC	VDD-V0	Ta=0℃ ϕ=0°	(25.0)	V	Driving Voltage	Ta=25℃ ϕ=0°	(24.0)	V	Note 3	Ta=50℃ ϕ=0°	(23.0)	V	ITEM	SYMBOL	CONDITION	TYP.	UNIT	Recommended LC	VDD-V0	Ta=0℃ ϕ=0°	22.0	V	Driving Voltage	Ta=25℃ ϕ=0°	21.0	V	Note 3	Ta=50℃ ϕ=0°	20.0	V	5.2 ELECTRICAL CHARACTERISTICS OF BACKLIGHT Starting discharge voltage min. (1000) → 1000 Deleted : Note The half brightness life time of backlight. CFL : 50,000h(average)
ITEM	SYMBOL	CONDITION	TYP.	UNIT																																		
Recommended LC	VDD-V0	Ta=0℃ ϕ=0°	(25.0)	V																																		
Driving Voltage		Ta=25℃ ϕ=0°	(24.0)	V																																		
Note 3		Ta=50℃ ϕ=0°	(23.0)	V																																		
ITEM	SYMBOL	CONDITION	TYP.	UNIT																																		
Recommended LC	VDD-V0	Ta=0℃ ϕ=0°	22.0	V																																		
Driving Voltage		Ta=25℃ ϕ=0°	21.0	V																																		
Note 3		Ta=50℃ ϕ=0°	20.0	V																																		

RECORD OF REVISION

DATE	SHEET No.	SUMMARY																												
Jul.11,'02	7B64PS-2706- SP14Q002-C1-4 PAGE 6-1/2	6.1 OPTICAL CHARACTERISTICS Revised Response(rise) tr : (336) → 120 Response(fall) tf : (148) → 150																												
Jul.16,'02	7B64PS-2703- SP14Q002-C1-5 PAGE 3-1/1	(10).Back Light Type Cold cathode fluorescent lamp. The half brightness life time of backlight CFL : 50,000h(average) ↓ Revised Cold cathode fluorescent lamp. CFL life time : 50,000h(average) Note : CFL life time = life time for half of CFL brightness.																												
	7B64PS-2709- SP14Q002-C1-5 PAGE 9-1/2	9.1 DIMENSIONS OUTLINE Dimensions express revised																												
	7B64PS-2709- SP14Q002-C1-5 PAGE 9-2/2	9.3 INTERFACE PIN CONNECTION 1.LCM I/F1 Revised → LCM CN1 2.LCM CFL I/F1 Revised → LCM CN2																												
	7B64PS-2710- SP14Q002-C1-5 PAGE 10-1/3	10.2 DEFINITION OF EACH ZONE B zone : edge line of LCD glass ↓ Revised B zone : Window of Metal Frame																												
Jul.18,'02	7B64PS-2704- SP14Q002-C1-6 PAGE 4-1/1	4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS <table border="1"><thead><tr><th rowspan="2">ITEM</th><th colspan="2">OPERATING</th><th colspan="2">STORAGE</th></tr><tr><th>MIN.</th><th>MAX.</th><th>MIN.</th><th>MAX.</th></tr></thead><tbody><tr><td>Ambient Temperature</td><td>0℃</td><td>50℃</td><td>-20℃</td><td>60℃</td></tr></tbody></table> ↓ Revised <table border="1"><thead><tr><th rowspan="2">ITEM</th><th colspan="2">OPERATING</th><th colspan="2">STORAGE</th></tr><tr><th>MIN.</th><th>MAX.</th><th>MIN.</th><th>MAX.</th></tr></thead><tbody><tr><td>Ambient Temperature</td><td>-20℃</td><td>70℃</td><td>-30℃</td><td>80℃</td></tr></tbody></table> Note 2 Ta at -20℃ < 48h, at 60℃ < 168h. ↓ Revised Note 2 Ta at -30℃ < 48h, at 80℃ < 168h.	ITEM	OPERATING		STORAGE		MIN.	MAX.	MIN.	MAX.	Ambient Temperature	0℃	50℃	-20℃	60℃	ITEM	OPERATING		STORAGE		MIN.	MAX.	MIN.	MAX.	Ambient Temperature	-20℃	70℃	-30℃	80℃
ITEM	OPERATING			STORAGE																										
	MIN.	MAX.	MIN.	MAX.																										
Ambient Temperature	0℃	50℃	-20℃	60℃																										
ITEM	OPERATING		STORAGE																											
	MIN.	MAX.	MIN.	MAX.																										
Ambient Temperature	-20℃	70℃	-30℃	80℃																										

3. GENERAL SPECIFICATIONS

(1) Part Name	SP14Q002-C1
(2) Outer Dimensions	167.0(W)mm×109.0(H)mm×10.0(D)mm(max)
(3) Effective Display Area	120(W)mm min. × 89(H)mm min.
(4) Dot Size	0.345(W)min. × 0.345(H)min.
(5) Dot Pitch	0.360(W)mm × 0.360(H)mm
(6) Dot Number (Resolution)	320 (W) × 240 (H) dots
(7) Duty Ratio	1/240
(8) LCD Type	Transmissive type F-STN With glare type upper polarizer
(9) Viewing Direction	6 O'clock
(10) Back Light Type	Cold cathode fluorescent lamp. CFL life time : 50,000h(average) Note : CFL life time = life time for half of CFL brightness.

4. ABSOLUTE MAXIMUM RATINGS

4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS

VSS=0V : STANDARD

ITEM	SYMBOL	MIN.	MAX.	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	0	6.0	V	
Power Supply for LC Drive	VDD-VEE	0	27.5	V	
Input Voltage	V_i	-0.3	VDD+0.3	V	Note 1
Input Current	I_i	0	1	A	
Static Electricity	VESD0	-	± 100	V	Note 2,3,4
	VESD1	-	± 10	kV	Note 2,3,5

Note 1 : DISP.OFF , FRAME , LOAD , CP , D0~D3.

Note 2 : Make certain you are grounded when handling LCM.

Note 3 : Energy storage capacitance 200pF, discharge resistance 250Ω Ta=25°C , 60%RH.

Note 4 : Contact discharge to I/F connector pins.

Note 5 : Contact discharge to front metal bezel.

4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	OPERATING		STORAGE		OMMNT
	MIN.	MAX.	MIN.	MAX.	
Ambient Temperature	-20°C	70°C	-30°C	80°C	Note 2,3,7
Humidity	Note 1		Note 1		Without Condensation
Vibration	-	2.45m/s ² (0.25G)	-	11.76m/s ² (1.2G) Note 5	Note 4 1h max.
Shock	-	29.4m/s ² (3 G)	-	490.0m/s ² (50 G) Note 5	X、Y、Z Directions
Corrosive Gas	Not Acceptable		Not Acceptable		

Note 1 Ta $\leq 40^\circ\text{C}$: 85%RH max.

Ta $> 40^\circ\text{C}$: Absolute humidity must be lower. Than the humidity of 85%RH at 40°C

Note 2 Ta at -30°C ——< 48h , at 80°C < 168h.

Note 3 Background color changes slightly depending on ambient temperature.

This phenomenon is reversible.

Note 4 5Hz~100Hz (Except resonance frequency)

Note 5 This module should be operated normally after finish the test.

Note 6 When LCM will be operated at 0°C , the life time of CFL will be reduced.

Need to make sure of value of the characteristics of inverter.

Also the response time at 0°C will be slower.

Note 7 Operation temp not include CFL & touch panel.

5. ELECTRICAL CHARACTERISTICS

5.1 ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply Voltage for Logic	VDD-VSS	-	5.0-5%	5.0	5.0+5%	V
Power Supply Voltage for LC Driving	VEE-VSS	-	-23.1	-22.0	-20.9	V
Input Voltage Note 1	VI	H LEVEL	0.8VDD	-	VDD	V
		L LEVEL	0	-	0.2VDD	V
Power Supply Current for Logic Note 4	IDD	VDD-VSS=5.0V VEE-VSS= -22.0V	-	6.0	-	mA
Power Supply Current for LC Driving Note 4	IEE	VDD-VSS=5.0V VEE-VSS= -22.0V	-	5.0	-	mA
Recommended LC Driving Voltage Note 2	VDD-V0	Ta= 0°C , $\phi = 0^\circ$	-	22.0	-	V
		Ta=25°C , $\phi = 0^\circ$	-	21.0	-	V
		Ta=50°C , $\phi = 0^\circ$	-	20.0	-	V
FRAME Frequency Note 3	fFRAME	-	70	75	80	Hz

Note 1 DISP.OFF , FRAME , LOAD , CP , D0~D3.

Note 2 Recommended LC driving voltage may fluctuate about $\pm 1.0V$ by each module.
Test pattern is all "Q"

Note 3 Need to make sure of flickering and rippling of display when setting the FRAME frequency in you set.

Note 4 fFRAME=75Hz ,test pattern is all "Q".
VDD-V0=(21.0)V , Ta=25°C

5.2 ELECTRICAL CHARACTERISTICS OF BACKLIGHT

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
Lamp Voltage	VL	-	(300)	-	Vrms	Ta=25°C
Frequency	fL	-	70	85	kHz	Ta=25°C
Lamp Current	IL	4	5	6	mAmps	Ta=25°C
Starting Discharge Voltage	VS Note 2	1000	-	-	Vrms	Ta=25°C

Please certainly inform HITACHI before designing lamp drive circuit according to the above specifications.

Note 1 Please make sure that your inverter is designed to meet the above specifications.

Note 2 Starting discharge voltage is increased when LCM is operating at lower temperature please check the characteristics of your inverter before applying to your set.

Note 3 Average life time of CFL will be decreased when LCM is operating at lower temperature.

Note 4 Under lower driving frequency of an inverter , a certain backlight system (CFL & CFL reflection sheet) may generate a sound noise.

Note 5 When ICFL is used over 5.5mA , it may cause uneven contrast near CFL location , due to heat dispersion from CFL.

6. OPTICAL CHARACTERISTICS


6.1 OPTICAL CHARACTERISTICS

$T_a=25^{\circ}\text{C}$ (Backlight on)

ITEM	SYMBOL	CONDITIONAL	MIN.	TYP.	MAX.	UNIT	NOTE
Viewing Area	$\phi_2-\phi_1$	$K \geq 2.0$	-	40	-	deg	1,2
Contrast Ratio	K	$\phi=0^{\circ}, \theta=0^{\circ}$	-	25	-	-	3
Response Time (Rise)	t_r	$\phi=0^{\circ}, \theta=0^{\circ}$	-	120	-	ms	4
Response Time (Fall)	t_f	$\phi=0^{\circ}, \theta=0^{\circ}$	-	150	-	ms	4


(Measure condition by HITACHI)

Note 1. Definition of θ and ϕ


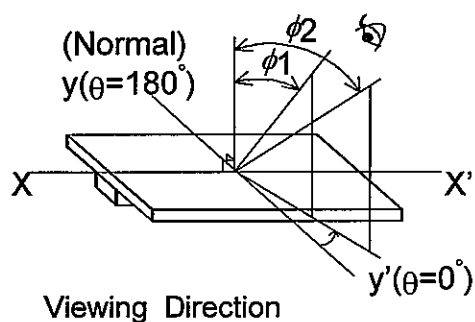


Note 3. Definition of contrast "K"


$$K = \frac{\text{Brightness on selected dot (B1)}}{\text{Brightness on non-selected dot (B2)}}$$

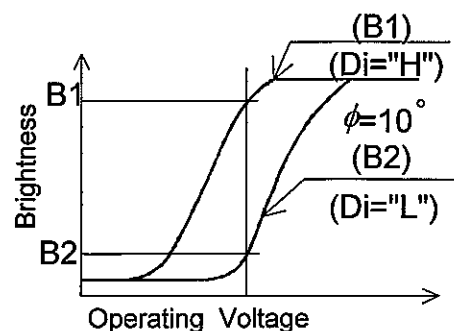

Note 2. Definition of viewing angle ϕ_1 and ϕ_2 .

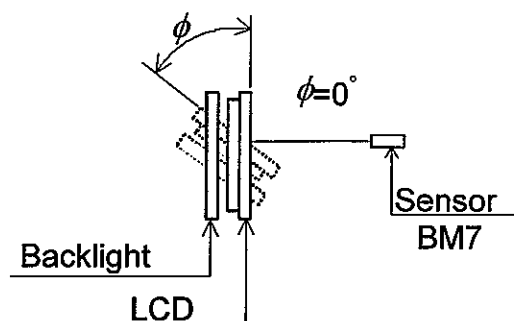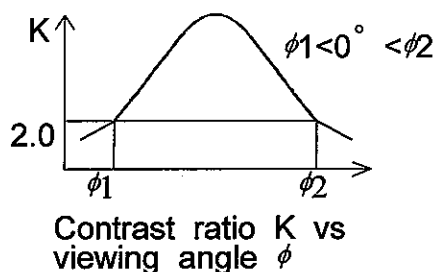

Note 4. Definition of optical response

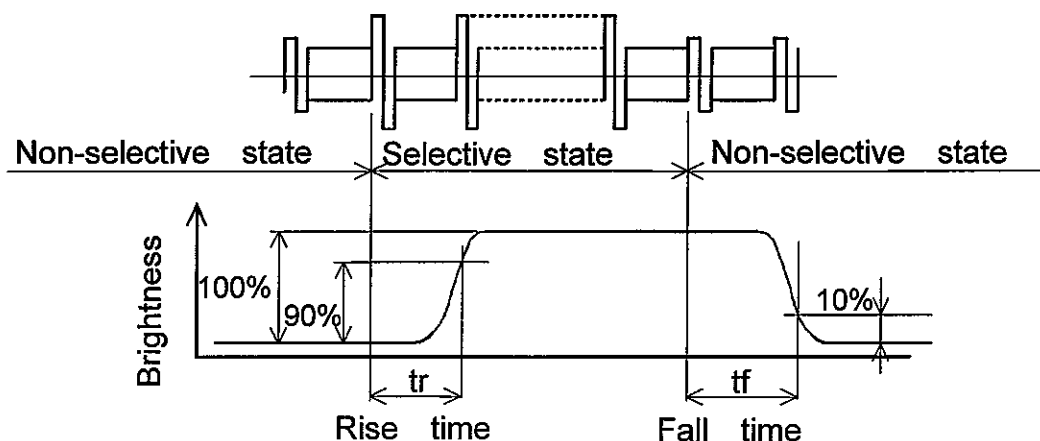

6.2 OPTICAL CHARACTERISTICS OF BACKLIGHT


I T E M	MIN.	TYP.	MAX.	UNIT	NOTE
Brightness	-	140	-	cd/m ²	IL=5mA Note 1,2
Rise Time	-	5	-	minute	IL=5mA Brightness 80%
Brightness Uniformity	-	-	±30	%	Undermentioned Note 1,3

CFL : Initial, Ta=25°C, VDD-V0=21.0V
Display data should be all "ON".

Note 1 Measurement after 10 minutes of CFL operating.

Note 2 Brightness control : 100%


Note 3 Measure of the following 9 places on the display.

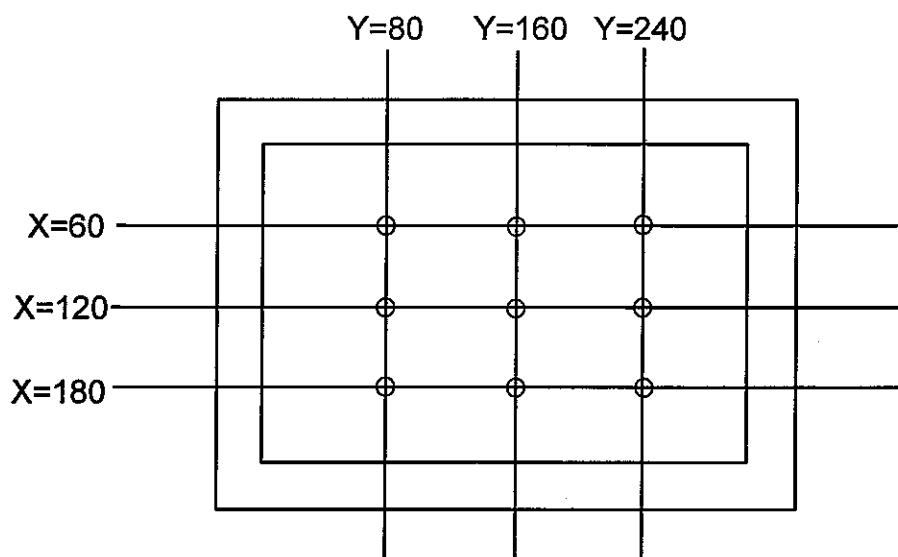

Definition of the brightness tolerance.


$$\left(\frac{\text{max. or min. Brightness} - \text{Average Brightness}}{\text{Average Brightness}} \right) \times 100\%$$

7. BLOCK DIAGRAM

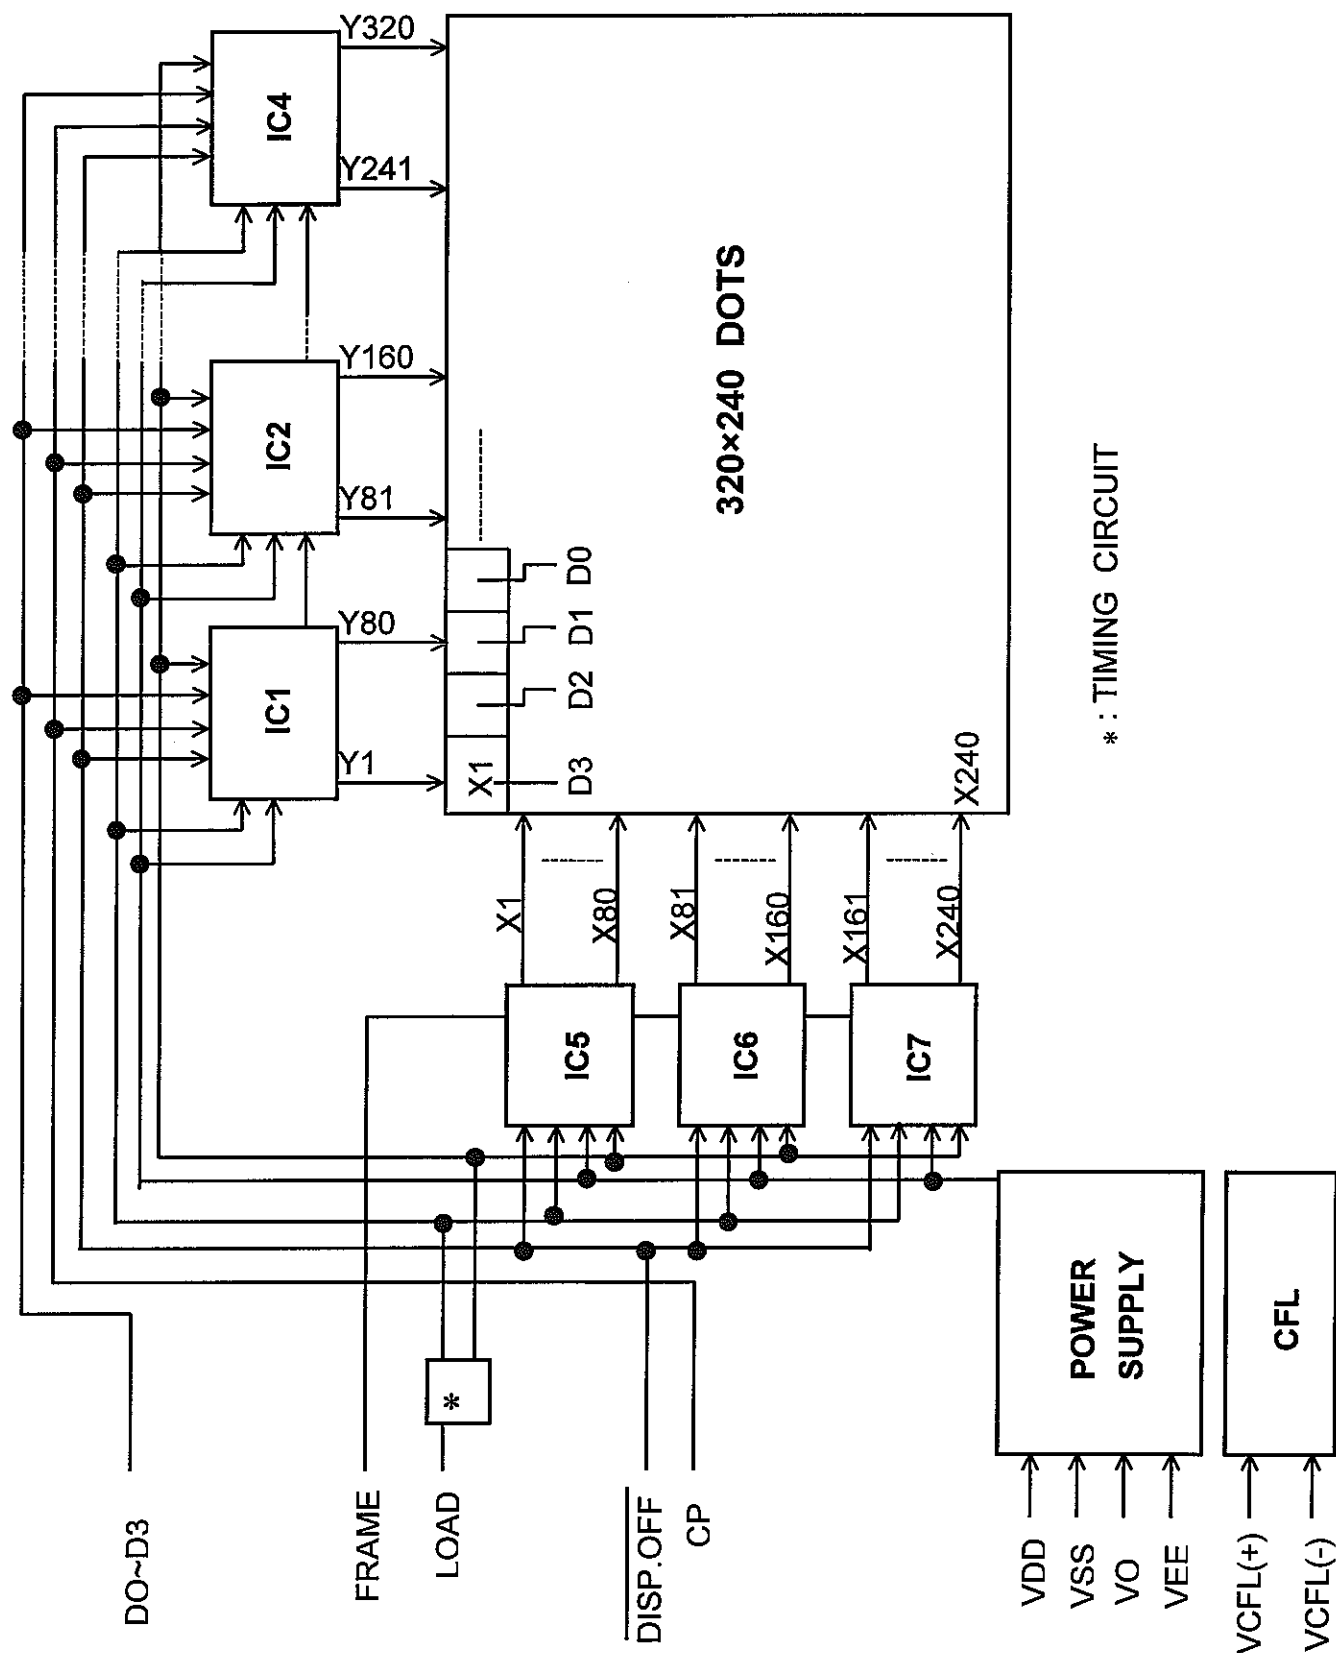

8. INTERFACE TIMING CHART


8.1 INTERFACE TIMING CHART

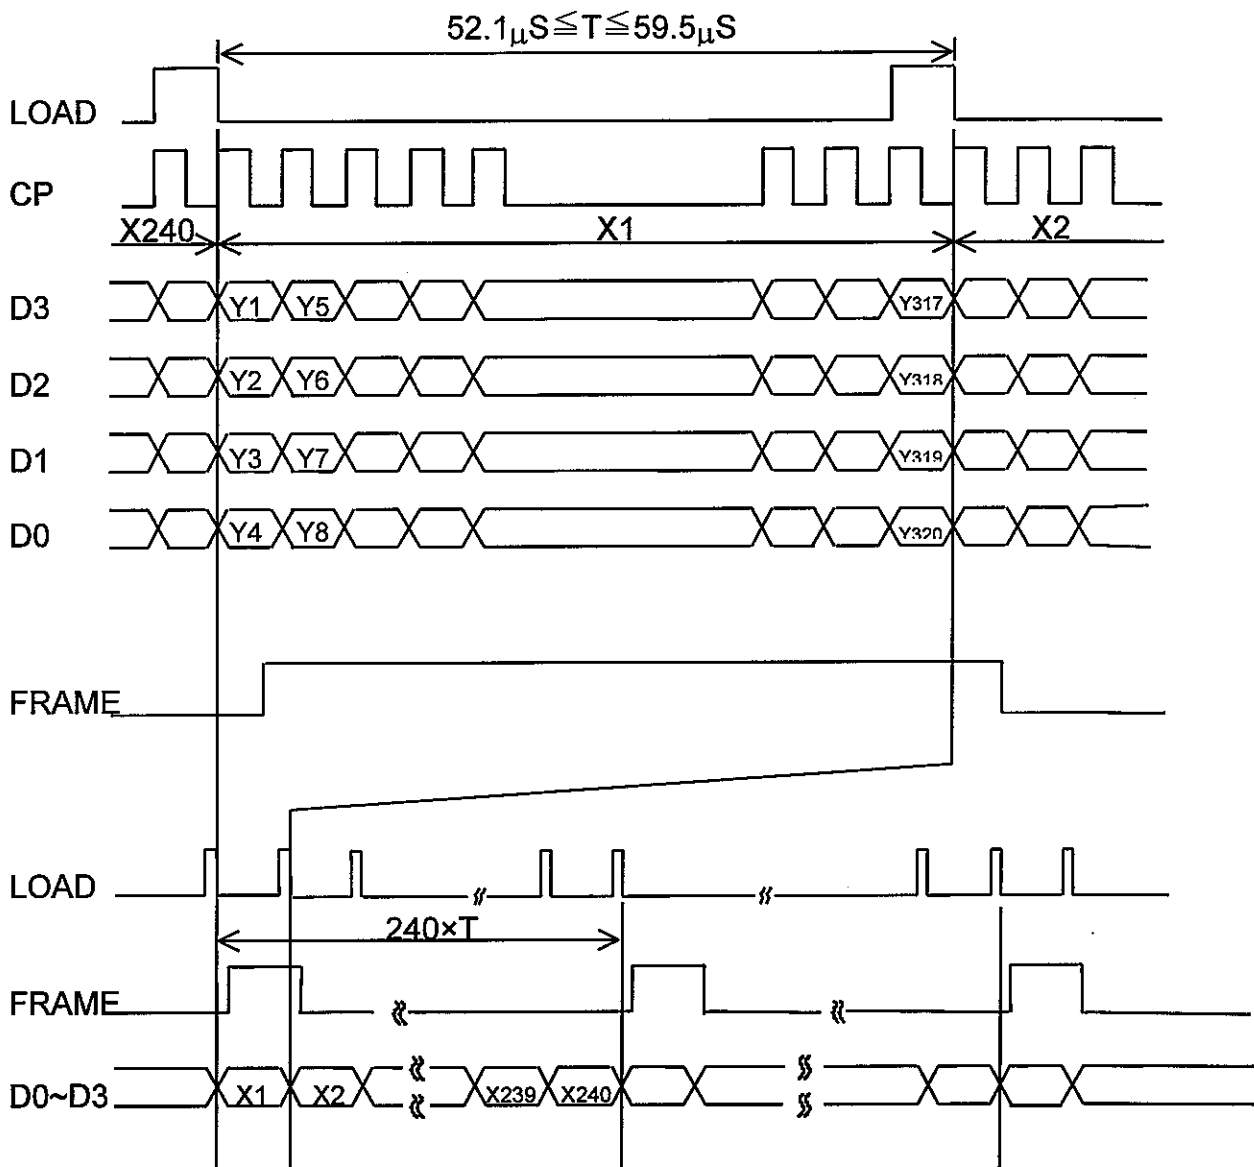


8.2 TIMING CHARACTERISTICS

$0^{\circ}\text{C} \leq T_a \leq 50^{\circ}\text{C}$, $V_{DD}=5.0\text{V} \pm 5\%$

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Clock frequency	fCP	-	-	6.5	MHz
Clock pulse width	tW	45	-	-	ns
Clock rise, fall time	tr,tf	-	-	15	ns
Data set up time	tDSU	30	-	-	ns
Data hold time	tDHD	30	-	-	ns
Load set up time	tLSU	80	-	-	ns
Load clock time	tLC	120	-	-	ns
"FRAME" set up time	tSETUP	100	-	-	ns
"FRAME" hold time	tHOLD	100	-	-	ns
"LOAD" pulse width	tWC	125	-	-	ns

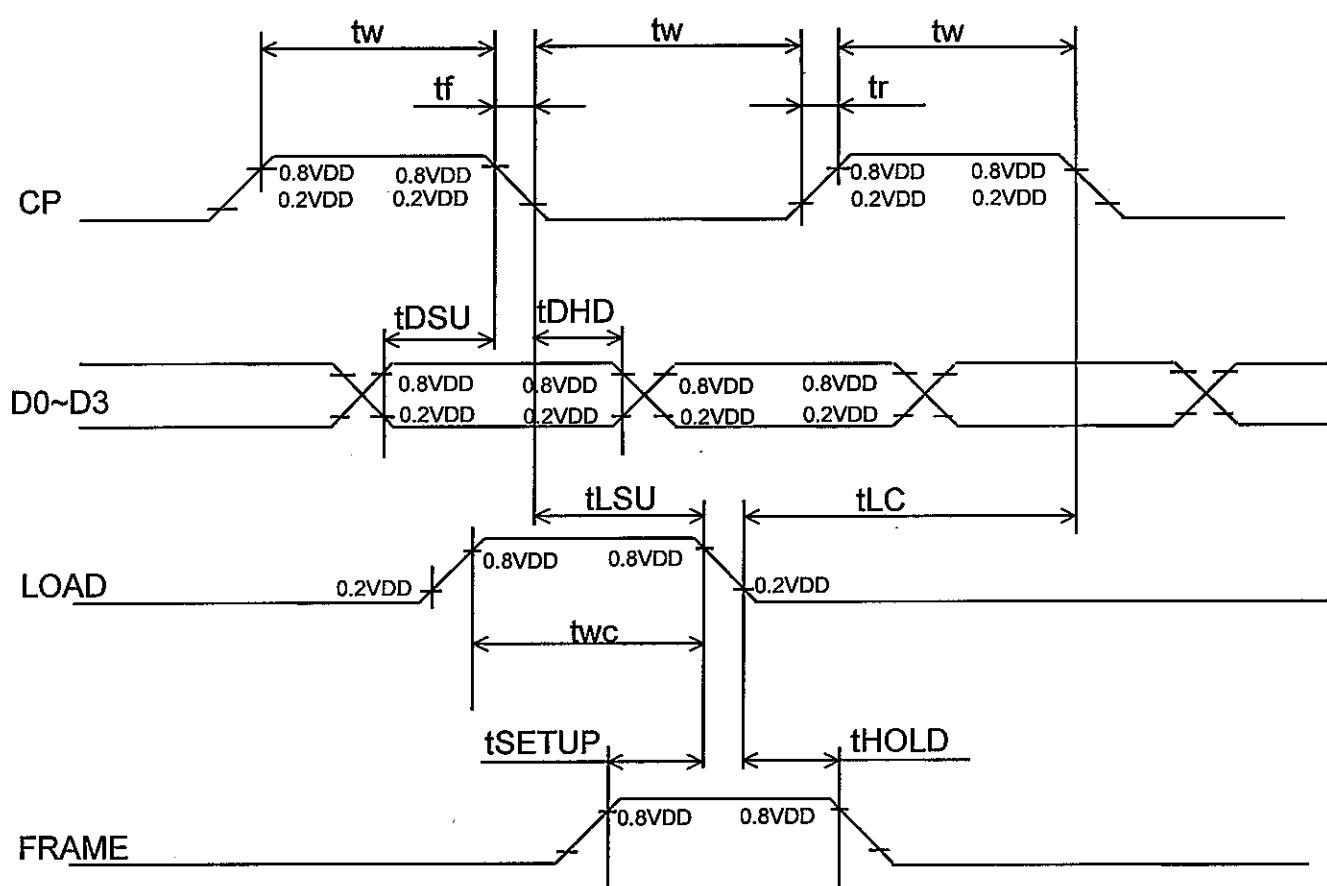

8.3 POWER ON/OFF TIMING SEQUENCE

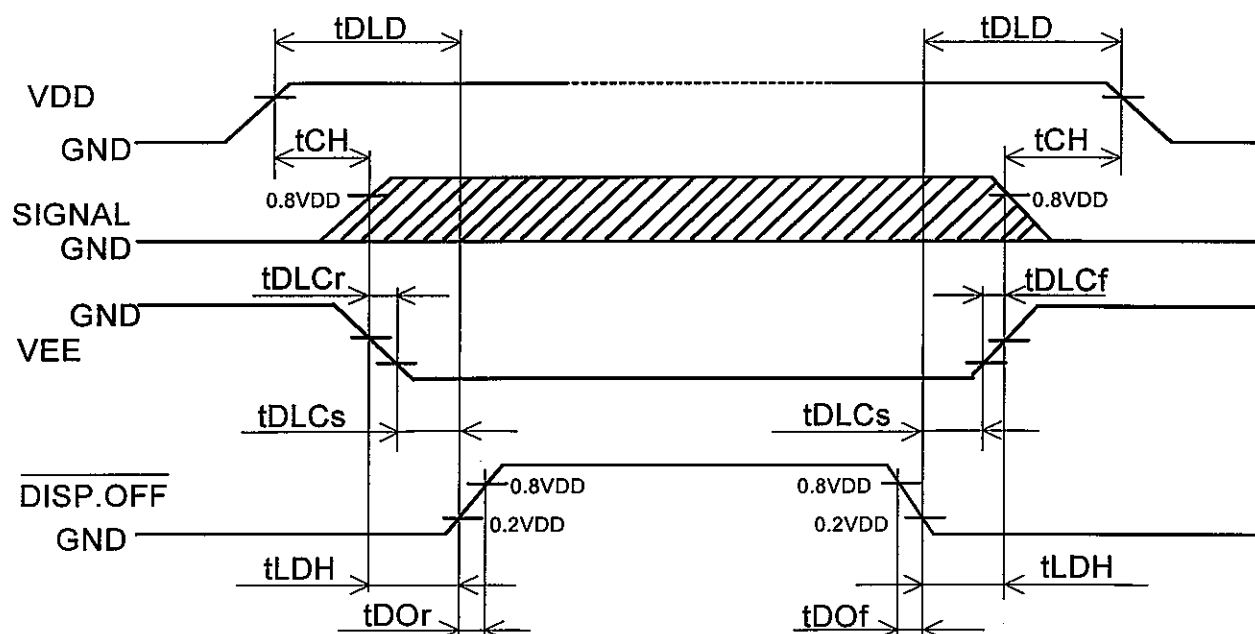


SYMBOL	MIN.	MAX.	UNIT	COMMENT
tDLD	200	-	ms	(NOTE 1)
tCH	0	200	ms	
tLDH	0	-	ms	
tDOr	-	100	ns	(NOTE 2)
tDOF	-	100	ns	
tDLCr	0	-	ms	
tDLCf	0	-	ms	
tDLCs	20	-	ms	

Note 1 Please keep the specified sequence because wrong sequence may cause permanent damage to the LCD panel.


Note 2 HITACHI recommends you to use DISP.OFF function. display quality may deteriorate if you don't use DISP.OFF function.

8.4 POWER SUPPLY FOR LCM (EXAMPLE)

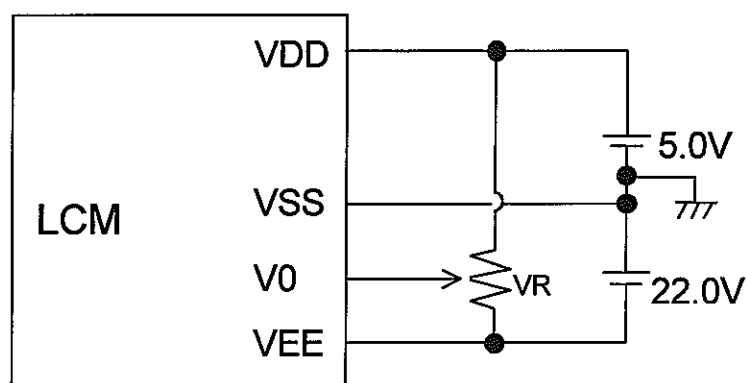

Note 1 : VR : 10kΩ


9. DIMENSIONS OUTLINE
9.1 DIMENSIONS OUTLINE

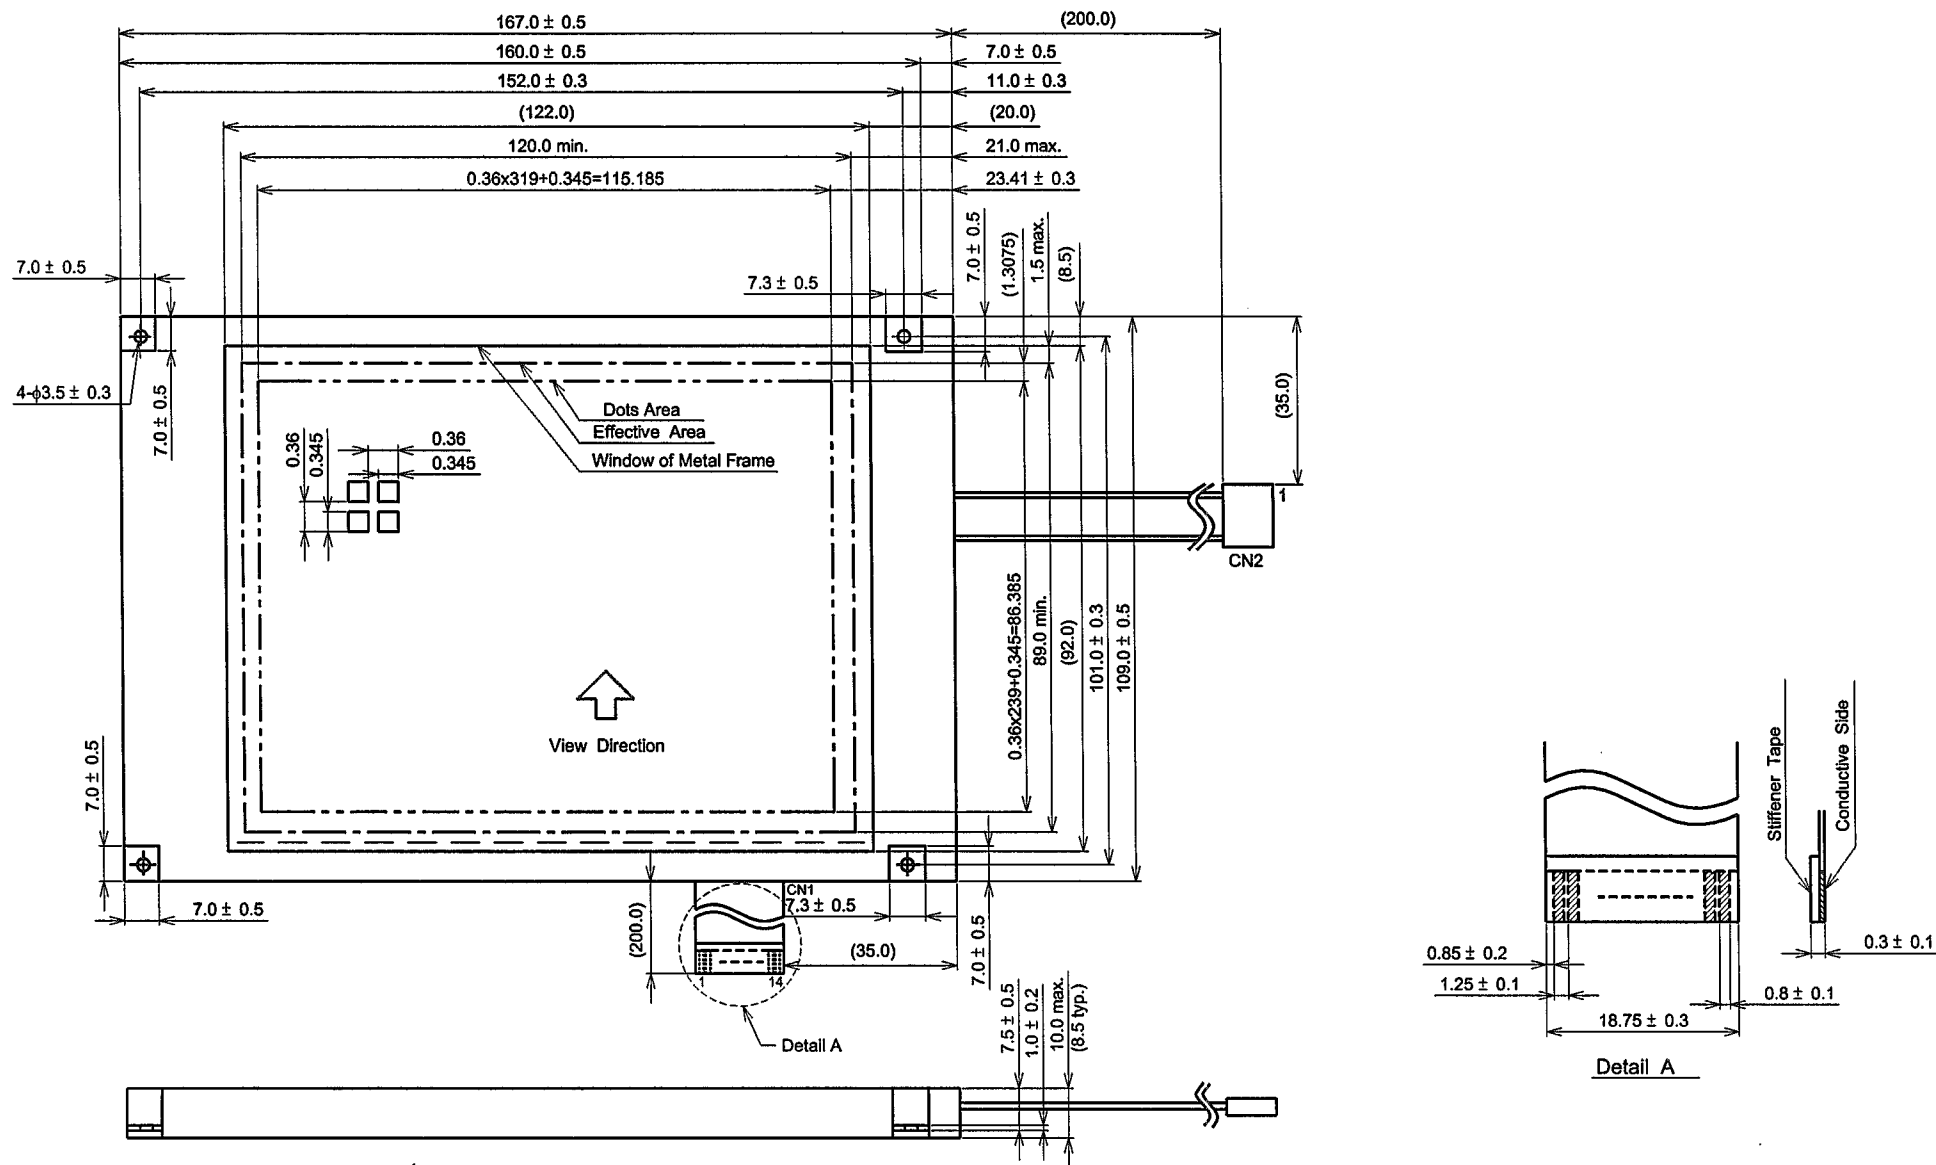

Note(1) Measurement when adding 9.8×10^4 Pa at the measuring point.

Scale : NTS
Unit : mm

9.2 DISPLAY PATTERN

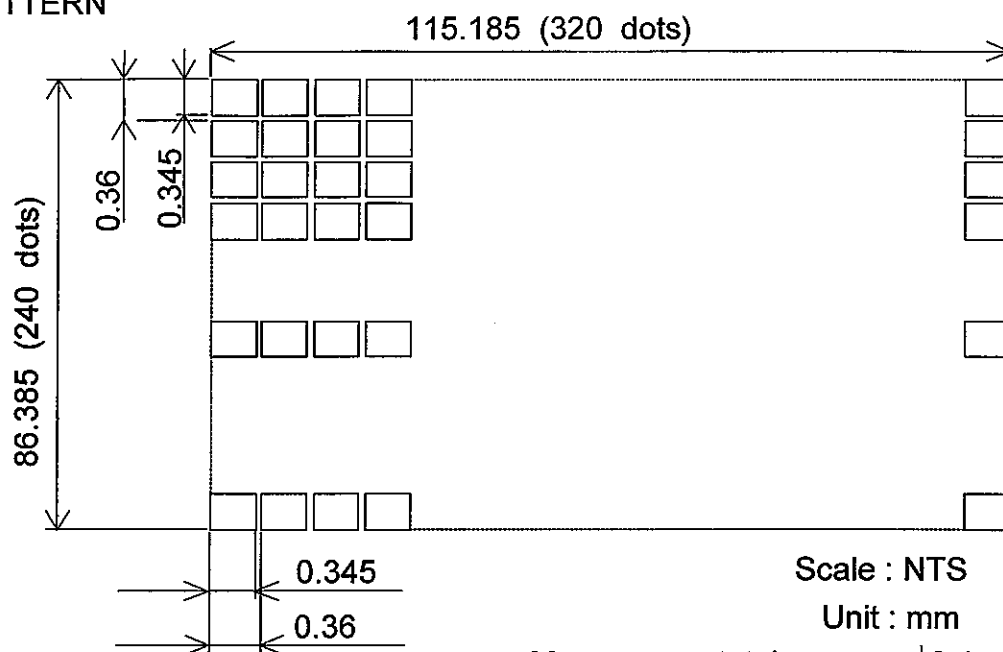

Scale : NTS

Unit : mm

Measurement tolerance : ± 0.1

9.3 INTERFACE PIN CONNECTION

FPC : pitch 1.25mm 14 pins

INTERFACE	PIN No.	SIGNAL	LEVEL	FUNCTION
LCM	CN1	1	H/L	Display Data
		2		
		3		
		4		
	5	DISP.OFF	H/L	H : ON / L : OFF
	6	FRAME	H	First Line Marker
	7	N.C	-	-
	8	LOAD	H→L	Data Latch
	9	CP	H→L	Data Shift
	10	VDD	-	Power Supply for Logic
	11	VSS	-	GND
	12	VEE	-	Power Supply for LC
	13	V0	-	Operating Voltage LC Driving
	14	VSS	-	GND


INTERFACE	PIN No.	SIGNAL	LEVEL	FUNCTION
LCM	CN2	1	-	Power Supply for CFL
		2	-	-
		3	-	-
		4	-	CFL GND

CFL I/F : J.A.E./IL - G - 4S - S3C2

10. APPEARANCE STANDARD

10.1 Appearance inspection conditions (in the effective viewing area) visual inspection should be under the following condition.


- (1) In the dark room.
- (2) With CFL panel lighted with prescribed inverter circuit.
- (3) With eye to LCD distance is 25cm.
- (4) Viewing angle within 45 degrees from the perpendicular to the center LCD.

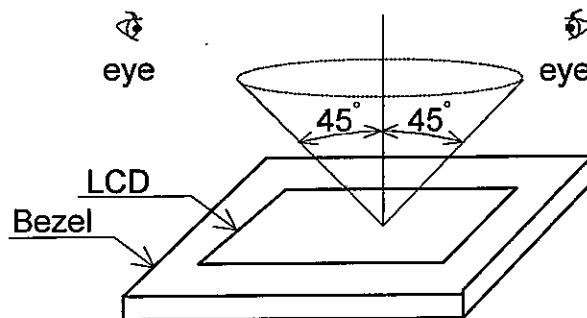

10.2 DEFINITION OF EACH ZONE

A zone : Within the effective area specified at page 9-1/2 of this document.

B zone : Area between the window of metal frame and the effective area line specified at page 9-1/2 of this document.

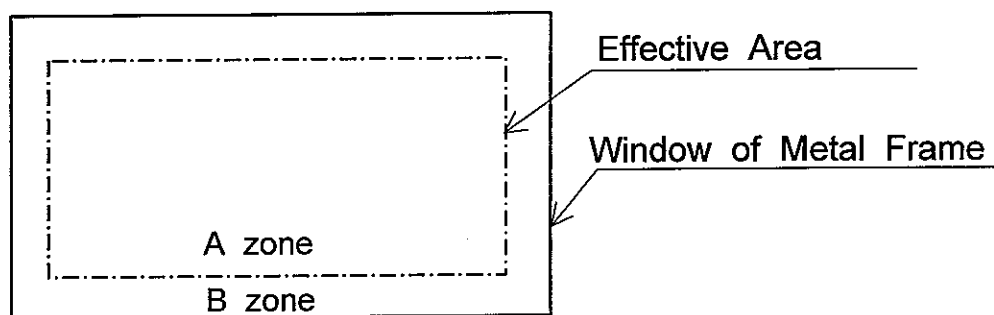

10.3 APPEARANCE SPECIFICATION

*) If a problem occurs in respect to any of these items, responsables of both parties (Customer and HITACHI) will discuss in more detail.


No.	ITEM	CRITERIA				A	B
L C D	Scratches	Distinguished one is not acceptable (To be judged by HITACHI limit sample)				*	-
	Dent	Same as above				*	-
	Wrinkles in Polarizer	Same as above				*	-
	Bubbles	Average diameter D(mm)		Maximum number acceptable		○	-
		D≤0.2		ignore			
		0.2<D≤0.3		12			
		0.3<D≤0.5		3			
		0.5<D		NONE			
	Stains, Foreign Materials, Dark Spot	Filamentous				○	-
		Length L(mm)	Width W(mm)	Maximum number acceptable			
		L≤2.0	W≤0.03	ignore			
		L≤3.0	0.03<W≤0.05	6			
		-	0.05<W	Judged by "Round" shape			
		Round				○	-
		Average diameter D(mm)	Maximum number acceptable	Minimum size			
		D<0.2	ignore	-			
		0.2 ≤D<0.33	8	10mm			
		0.33≤D	None	-			
		Total	Filamentous + Round = 10				
		Those wiped out easily are acceptable				○	○
		Color Tone	To be judged by HITACHI limit sample				○
	Color Uniformity	Same as above				○	-
	Pinhole	Average diameter D(mm)		Maximum number acceptable		○	-
D≤0.15		ignore					
0.15<D≤0.3		10					
C≤0.015		ignore					
Contrast Irregularity (Spot)	Average diameter D(mm)	Contrast	Maximum number acceptable	Minimum size	○	-	
	D≤0.25	To be judged by HITACHI	ignore	-			
	0.25<D≤0.35		10	20mm			
	0.35<D≤0.5		4	20mm			
	0.5 <D		None	-			

No.	ITEM	CRITERIA				A	B
L C D	Contrast Irregularity (Line) (Filamentous)	Width D(mm)	Length L(mm)	Maximum number acceptable	Minimum size	○	-
		$W \leq 0.25$	$L \leq 1.2$	2	20mm		
		$W \leq 0.2$	$L \leq 1.5$	3	20mm		
		$W \leq 0.15$	$L \leq 2.0$	3	20mm		
		$W \leq 0.1$	$L \leq 3.0$	4	20mm		
	TOTAL			6			
Rubbing Scratch	To be judged by HITACHI standard				○	-	


No.	ITEM	CRITERIA		
C	Dark Spots, White Spots	$D \leq 0.4$	ignore	
F	Foreign Materials (Spot)	$D > 0.4$	None	
L B / L	Foreign Materials (Line)	$W \leq 0.2$	$L < 2.5$	≤ 1
		$W \leq 0.2$	$L > 2.5$	None
		$W > 0.2$	None	
		$W \leq 0.1$	ignore	
	Scratches	$0.1 < W \leq 0.2$	$L \leq 11.0$	≤ 1
		$0.1 < W \leq 0.2$	$L \geq 11.0$	None
		$W < 0.2$	None	

Note


(1) Definition of average diameter D

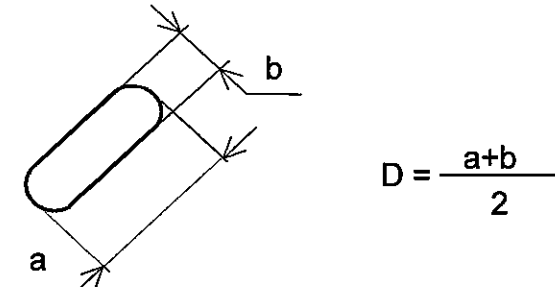

(2) Definition of length L and width W

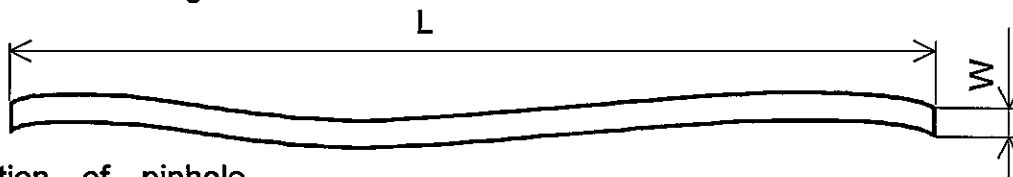

(3) Definition of pinhole

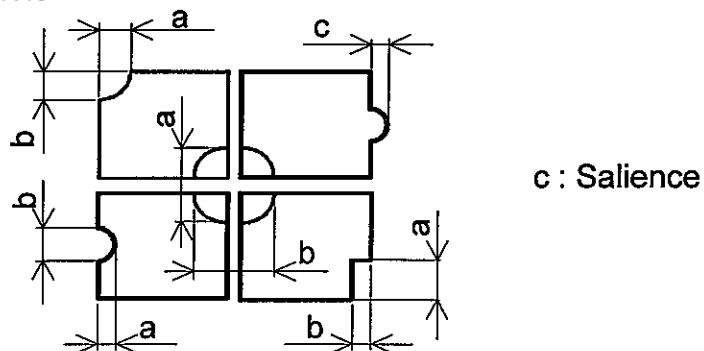

11. PRECAUTION IN DESIGN

11.1 LC DRIVING VOLTAGE (VEE) AND VIEWING ANGLE RANGE

Setting VEE out of the recommended condition will be a cause for a change of viewing angle range.

11.2 CAUTION AGAINST STATIC CHARGE

As this module is provided with C-MOS LSIs The care to take such a precaution as grounding the operator's body is required when handling it.

11.3 POWER ON SEQUENCE

Input signals should not be applied to LCD module before power supply voltage is applied and reaches to specified voltage ($5V \pm 0.5\%$).

If above sequence is not kept, C-MOS LSIs of LCD modules may be damaged due to latch up problem.

11.4 PACKAGING

- (1) No. Leaving product is preferable in the place of high humidity for a long period of time. For their storage in the place where temperature is 35 degree C or higher, special care to prevent them from high humidity is required. A combination of high temperature and high humidity may cause them polarization degradation as well as bubble generation and polarizer peel-off. Please keep the temperature and humidity within the specified range for use and storage.
- (2) Since upper/bottom polarizers tend to be easily damaged, They should be handled full with care so as not to get them touched, pushed or rubbed.
- (3) As the adhesives used for adhering upper/bottom polarizers are made of organic substances which will be deteriorated by a chemical reaction with such chemicals as acetone, toluene, ethanol and isopropylalcohol. The following solvents are recommended for use:
Normal hexane
Please contact us when it is necessary for you to use chemicals.
- (4) Lightly wipe to clean the dirty surface with absorbent cotton waste or other soft material like chamois, soaked in the chemicals recommended without scrubbing it hardly. To prevent the display surface from damage and keep the appearance in good state, it is sufficient, in general, to wipe it with absorbent cotton.

- (5) Immediately wipe off saliva or water drop attached on the display area because its long period adherence may cause deformation or faded color on the spot.
- (6) Foggy dew deposited on the surface and contact terminals due to coldness will be caused for polarizer damage, stain and dirt on product. When necessary to take out the products from some place at low temperature for test, etc. It is required for them to be warmed up in a container once at the temperature higher than that of room.
- (7) Touching the display area and contact terminals with bare hands and contaminating them are prohibited, because the stain on the display area and poor insulation between terminals are often caused by being touched by bare hands.
(There are some cosmetics detrimental to polarizers.)
- (8) In general the quality of glass is fragile so that it tends to be cracked or chipped in handling, specially on its periphery. Be careful not to give it sharp shock caused by dropping down, etc.

11.5 CAUTION FOR OPERATION

- (1) It is an indispensable condition to drive LCDs within the specified voltage limit since the higher voltage than the limit causes the shorter LCD life. An electrochemical reaction due to direct current causes LCDs undesirable deterioration, so that the use of direct current driver should be avoided.
- (2) Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCDs show dark bull color in them. However those phenomena do not mean malfunction or out of order with LCDs which will come back in the specified operating temperature range.
- (3) If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- (4) A slight dew depositing on terminals is a cause for electrochemical reaction resulting in terminal open circuit. Usage under the relative condition of 40 degree C 50%RH or less is required.

11.6 STORAGE

In case of storing for a long period of time (for instance , for years) for the purpose of replacement use , the following ways are recommended.

- (1) Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it , and with no desiccant.
- (2) Placing in a dark place where neither exposure to direct sunlight nor light is , keeping temperature in the range from 0 degree C to 35 degree C.
- (3) Storage with no touch on polarizer surface by anything else. (It is recommended to store them as they have been contained in the inner container at the time of delivery from us.)


11.7 SAFETY

- (1) It is recommendable to crash damaged or unnecessary LCDs into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol , which should be burned up later.
- (2) When any liquid leaked out of a damaged glass cell comes in contact with your hands , please wash it off well with soap and water.

12. DESIGNATION OF LOT MARK

LOT MARK

LOT MARK IS CONSISTED OF 4 DIGIT NUMBER.

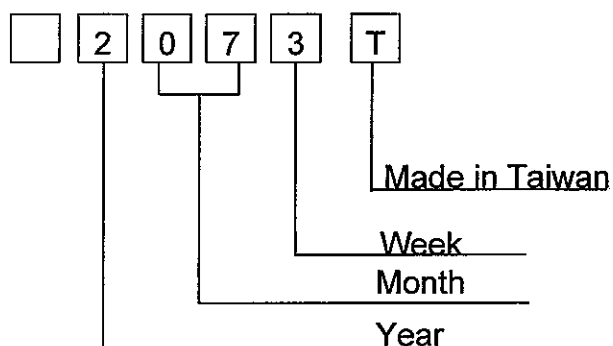

YEAR	FIGURE IN LOT MARK
2002	2
2003	3
2004	4
2005	5
2006	6

Note 1. Some products have alphabet at the end or the first.

MONTH	FIGURE IN LOT MARK	MONTH	FIGURE IN LOT MARK
Jan.	01	Jul.	07
Feb.	02	Aug.	08
Mar.	03	Sep.	09
Apr.	04	Oct.	10
May	05	Nov.	11
Jun.	06	Dec.	12

WEEK (DAY IN CALENDAR)	FIGURE IN LOT MARK
01~07	1
08~14	2
15~21	3
22~28	4
29~31	5

Location of lot mark : on the back side of LCM

2073T

13. PRECAUTION FOR USE

13.1 A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgement by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

13.2 On the following occasions, the handling of the problem should be decided through discussion and agreement between responsible persons of the both parties.

- (1) When a question is arisen in the specifications.
- (2) When a new problem is arisen which is not specified in this specifications.
- (3) When an inspection specifications change or operating condition change in customer is reported to HITACHI, and some problem is arisen in this specification due to the change.
- (4) When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

The precaution that should be observed when handling LCM have been explained above. If any points are unclear or if you have any request , please contact HITACHI.